


Model BL784 Chilled Mirror Dew Point Meter

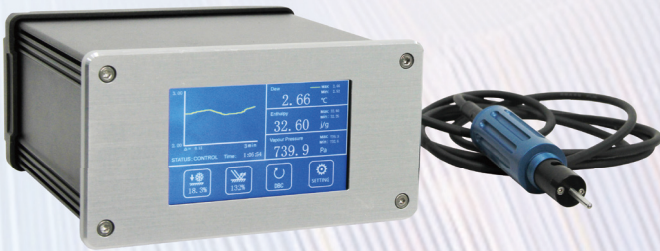

Chilled mirror dew point meter is a precise technique for determining the water vapor content in gases by directly measuring dew point or frost temperatures. Using this technique a metal mirror is cooled until it reaches a temperature at which a thin layer of condensation begins to form on it. The dew layer is detected optically, and the mirror is held at that temperature. The mirror temperature, measured with a PRT, is an accurate indicator of dew or frost point.

FEATURES

- Dew/frost point range -20°C to +85°C
- Accuracy to ± 0.20 °C dew point
- Dynamic balance control for contamination
- Simultaneously measures dew point, temperature, relative humidity, absolute humidity, specific humidity, enthalpy, vapor pressure and volume ratio (ppmV).
- Real time data logging and curve display
- MAX value and MIN value are recorded
- AC or alternative DC power supply
- MODBUS RTU and USB communication
- 4 inch touch screen

APPLICATION

- Reference standard in calibration lab
- Inlet air measurement for engine testing
- Heating ventilation and air conditioning test
- Environment monitoring in clean room
- Humidity control for metallurgical processes
- Coating process monitoring in pharmacy
- Reference humidity instruments for climatic and environmental chambers

SPECIFICATION

- Dew point range: -20 to +85°C , (4.41~100%RH @20°C)
- Dew point accuracy: ± 0.20 °C (calibration: -15°C to +20°C)
- Dew point resolution: 0.01°C
- Dew point reproducibility error: ± 0.05 °C
- Temperature range: -45°C to +90°C
- Temperature accuracy: ± 0.10 °C (calibration: -10°C ~60°C)
- Temperature resolution: 0.01°C
- Temperature reproducibility error: ± 0.05 °C
- Working environment: -20°C to +60°C , 10%RH to 90%RH, 101.325kPa (custom atm. is option)
- Mirror temperature measurement: 4 wire PT100 1/3B
- Depression: Single stage, 45°C at 25°C
- Probe material: SUS304 stainless steel
- Cable material: Polyurethane material with shielding layer
- Response time: Max cooling 0.8°C /s, + 15s balance time
- Sampling airflow rate: 0.1~1NL/min (The volume of ventilation is inversely proportional to the dew point)
- Cooling type: Peltier cooling
- Output signal: Modbus RTU, USB
- Power supply: 100-24VAC 35W or USB Type-C 5V/2A 10W
- Ingress protection grade: IP54
- Dimension: 160mm (W) x 165mm (D) x 85mm (H)
- Weight: 4kg includes standard accessories

SCOPE OF DELIVERY

- BL784 Chilled mirror dew point meter
- Single stage chilled mirror dew point sensor
- 2 meters dew point sensor connection cable
- USB2.0 into USB type-C cable
- Standard AC Power cord
- User manual
- Carrying case

OPTIONAL ACCESSORIES AND SERVICES

- ISO17025 accredited calibration certificate
- 5 meters dew point sensor cable

HOW TO ORDER

- BL784-110V
- BL784-220V